


MODEL	DISPLAY	SENSORS		
		TEMPERATURE	CO ₂	HUMIDITY
TP-VAV-DISP-B/W*-2	•	•		
TP-VAV-C-DISP-B/W*-2	•	•	•	
TP-VAV-H-DISP-B/W*-2	•	•		•
TP-VAV-HC-DISP-B/W*-2	•	•	•	•

*B/W: all panels are available in black or white, which is reflected in the B (black)/W (white) letter of the product code, e.g., TP-VAV-H-DISP-B-2 or TP-VAV-C-DISP-W-2.

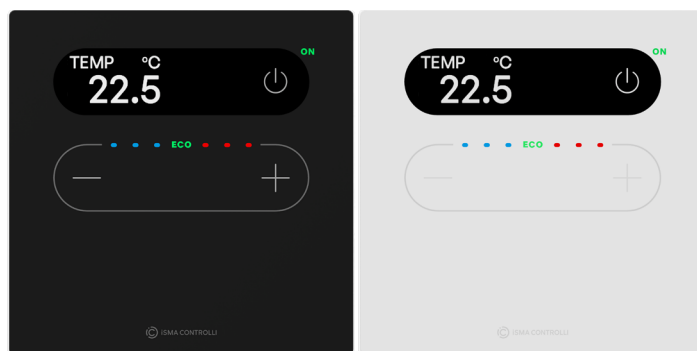

APPLICATION AND USE

The Touch Point VAV 2.0 is a modern room operating unit supporting Modbus RTU/ASCII and BACnet MS/TP communication protocols. Optimized for room comfort control applications in spaces where fan control is not required or handled automatically. The panel combines intuitive operation with an elegant design for modern interiors. Available in different configurations of built-in sensors (temperature, CO₂, and humidity), and colors, all versions are equipped with a display and capacitive touch interface. The panel can be configured using the iSMA Configurator software or via Modbus registers/BACnet objects. Thanks to the Smart Plug™ interfaces, installation is fast and simple, while daisy-chain connectivity ensures flexible system expansion. The device fits most standard European junction boxes and can be easily installed using a wall back box.

FEATURES

- Designed to fit any interior with an elegant black or pure white glass front
- Intuitive management with touch buttons
- Ease of configuration with a free iSMA Configurator app and USB-C connection
- 2 Smart Plug™ connectors, combining serial communication and power supply in a single RJ45 port
- 1 screw connector for direct RS485 and power supply
- Daisy-chain support
- Directly powered from controllers supporting Smart Plug™
- Flexible sensors configurations with temperature, humidity, and CO₂ sensors
- Open communication with Modbus RTU/ASCII and BACnet MS/TP, selectable with a DIP switch
- Alarm functionality for high CO₂ levels
- Freely configurable RGB LED
- Flush wall box 60 mm, US 1-gang electrical outlet box

TECHNICAL CHARACTERISTICS




DESCRIPTION		TOUCH POINT VAV 2.0
Power supply	Voltage	DC: 20-40 V, AC: 24 V AC ± 20%
	Power consumption	0.6 W at 24 V DC, 1.9 VA at 24 V AC
Built-in sensors	Temperature sensor	10k NTC type, range: 0-50°C, accuracy: ± 0.5°C, resolution: ± 0.1°C
	Humidity sensor (applies to version with humidity sensor)	Range: 0-100% RH, accuracy: ± 2% RH in range 10-90% RH, resolution: ± 0.1% RH
	CO ₂ sensor (applies to version with CO ₂ sensor)	Range: 400-2000 ppm, accuracy: 50 ppm + 5% of reading
COM1	RS485 interface	Up to 128 devices
	Communication protocols	Half-duplex Modbus RTU/ASCII, BACnet MS/TP
	Ports	2 Smart Plug RJ45 + screw connector
	Baud rate	2400-115200
USB1	USB	USB type C

The performances stated in this sheet can be modified without any prior notice.


DESCRIPTION		TOUCH POINT VAV 2.0
Front panel	Surface	White/black glass
	Display	TFT 0.96"
	Backlight	3 intensity modes
	Buttons	3
	LED	3 blue, 3 red for temperature 1 green for occupancy 1 green (configurable, ECO) 1 navigation (configurable RGB)
Ingress protection	IP rating	IP20 for indoor installation
Temperature	Operating	From 0°C to +40°C
	Storage	From -40°C to +70°C
Humidity	Relative	From 5% to 95% RH (without condensation)
Screw connector	Type	Removable screw terminals
	Maximum cable size	1.5 mm ² (24...16 AWG)
Housing	Material	Plastic, self-extinguishing ABS
	Mounting	Standard 60 mm wall back box
Dimensions	Width	86.00 mm/3.39 in
	Length	86.00 mm/3.39 in
	Height	14.80 mm/0.58 in

WIRING DIAGRAMS


Power Supply

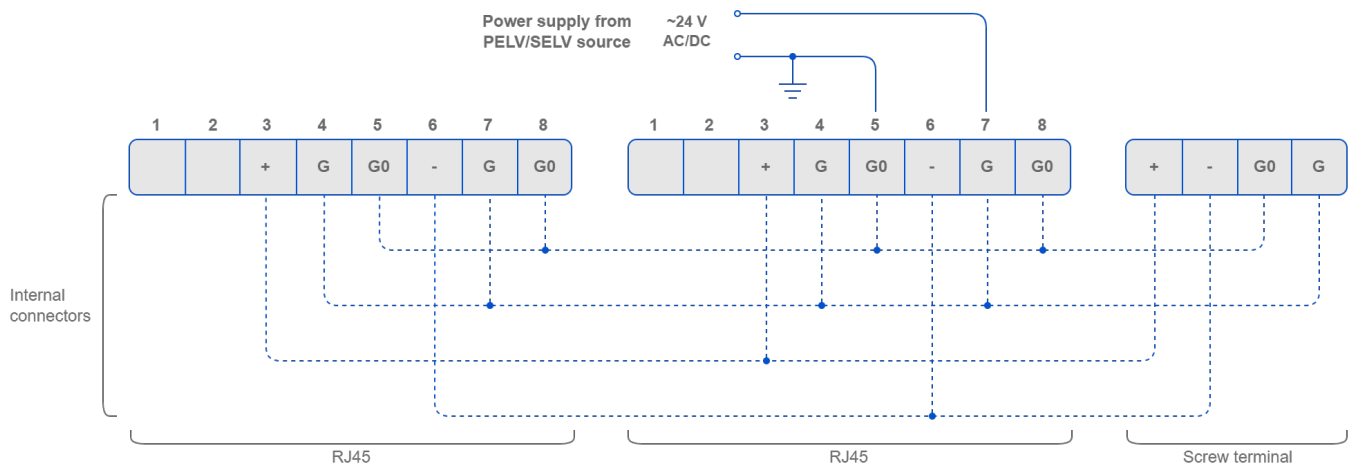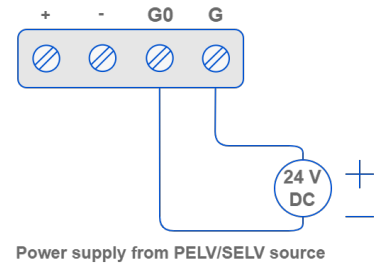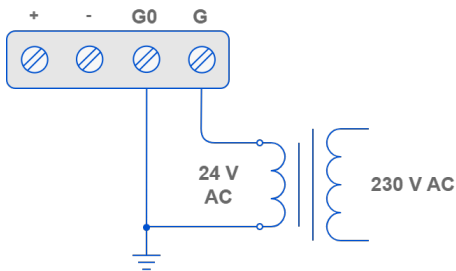

Communication

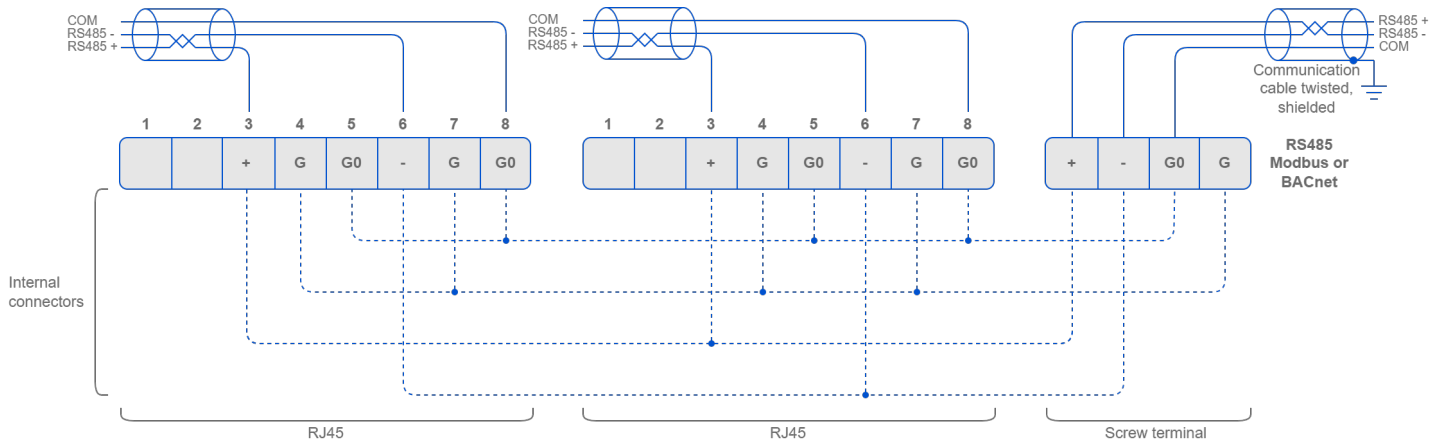

APPLICATION EXAMPLE

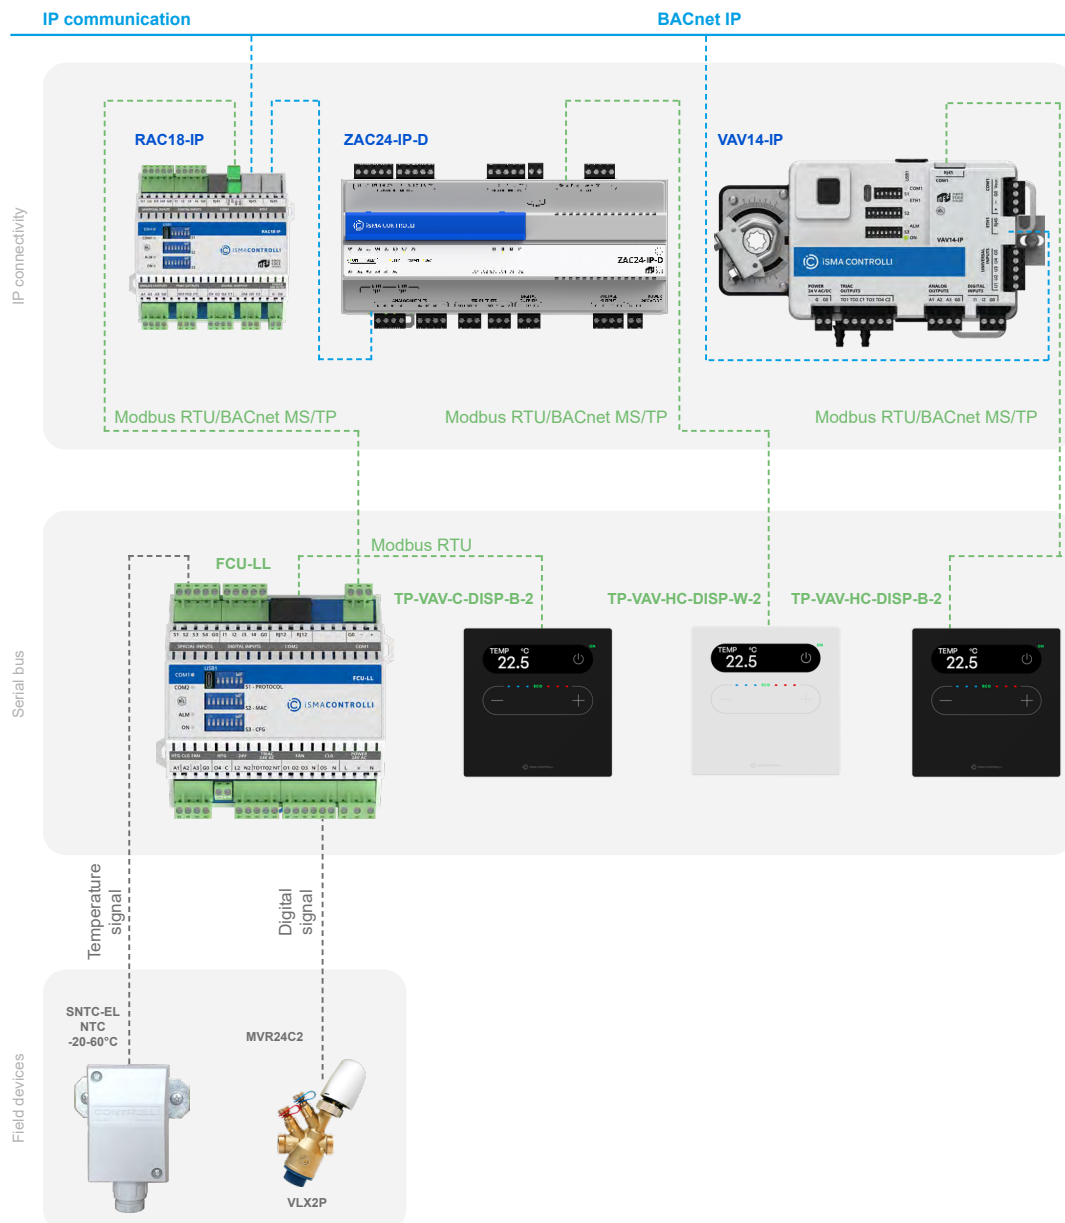



iSMA Configurator - configuration tool for non-programmable iSMA CONTROLLI devices

DIMENSIONS [mm]

